


SPIGOLO WALL

Studiocharlie

Floor, wall/ceiling and pendant lamps based on an extruded and tubular aluminium structure, connected with moulded ABS joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. The floor version is designed as such to provide a virtual divider to ambiances, while the ceiling and wall versions allow the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable and with warm tone.

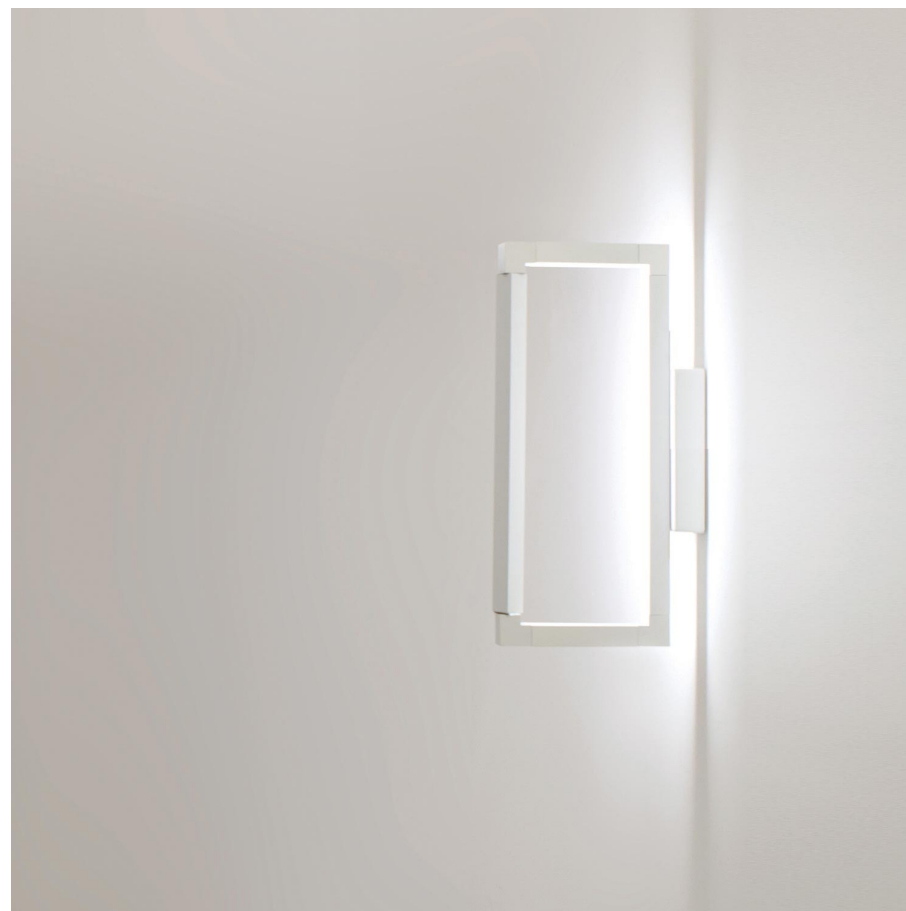

LED

LAMPING

Source	linear LED
Total power	20W
Emission	orientable, diffused
Tension	110/240V
Color temperature	3000K
Luminous flux	2000lm
Typ cri	83
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

SPI LWW 31

SPI LNN 31

Structure

white

black

Certificazioni

